

# Super Cast Pig

2" – 12" options 2 cup to 7 cup



## Description

The one piece Super Cast pig offers a cost effective alternative to poly foam pigs. Available in diameters from 2"-12", the Super Cast Pig is the ideal product for a broad range of applications around refineries, chemical plants, oil and gas pipelines, and municipal utility lines. Its soft durometer allows it to last significantly longer than poly foam pigs. It can negotiate 1.5R bends, bridge valves, and tees, without buckling, tearing, or shredding. The Super Cast Pig is available as a cup pig or as a bidirectional disc pig. The Super Cast cup pig is available with a configuration of between 2 and 7 cups. Super Cast Pigs use the same long-lasting MDI polyurethane as all of S.U.N. Engineering's urethane products. Super Cast

Pigs are available in three durometers, depending on your requirements.

## Options


- Sizes 2" to 12"
- Several Durometer Hardnesses
- 2 to 7 cup variations
- Magnet can be mounted





# Super Cast Pig

## 2" – 12" options 2 cup to 7 cup

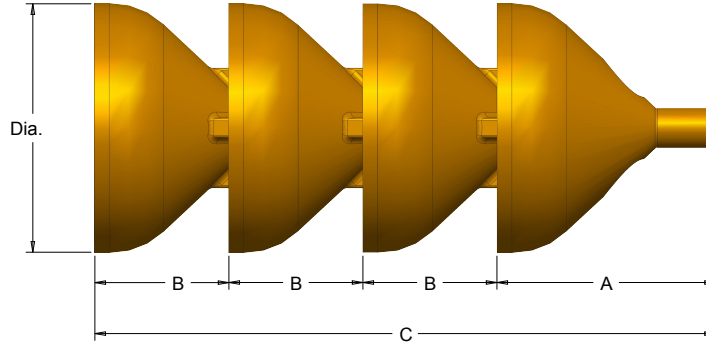

**Super Cast Pig Nominal Dimensions**

No. of Cups	DIA. (Inches)	A Inches	B Inches	C Inches	Weight lbs.	Durometer
2	2.25	2	2.25	4.5	0.22	55,65,75,85
3	3.4	3.25	2.5	8.25	1.14	55,65,75,85
	4.35	3.5	3	9.5	1.62	55,65,75,85
	6.5	5	3.75	12.5	4.45	55,65,75,85
	8.5	5.5	4.75	15	9.54	55,65,75,85
	10.72	7	5.5	18	15.21	55,65,75,85
	12.75	7.5	6.75	21	24.25	55,65,75,85
4	3.4	3.25	2.5	10.75	1.75	55,65,75,85
	4.35	3.5	3	12.5	2.23	55,65,75,85
	6.5	5	3.75	16.25	6.06	55,65,75,85
	8.5	5.5	4.75	19.75	12.77	55,65,75,85
	10.72	7	5.5	23.5	21.38	55,65,75,85
	12.75	7.5	6.75	27.75	33.21	55,65,75,85
5	4.35	3.5	3	15.5	1.94	55,65,75,85
	6.5	5	3.75	20	7.75	55,65,75,85
	8.5	5.5	4.75	24.5	16.12	55,65,75,85
	10.72	7	5.5	29	26.57	55,65,75,85
	12.75	7.5	6.75	34.5	43.37	55,65,75,85
6	6.5	5	3.75	23.75	9.4	55,65,75,85
	8.5	5.5	4.75	29.25	20	55,65,75,85
	10.72	7	5.5	34.5	32.86	55,65,75,85
	12.75	7.5	6.75	41.25	53	55,65,75,85
7	6.5	5	3.75	27.5	11.36	55,65,75,85
	8.5	5.5	4.75	34	23.92	55,65,75,85
	10.72	7	5.5	40	38	55,65,75,85
	12.75	7.5	6.75	48	61.54	55,65,75,85