


Super Flex

3D2C / 5D2C

6" – 12" & 16"

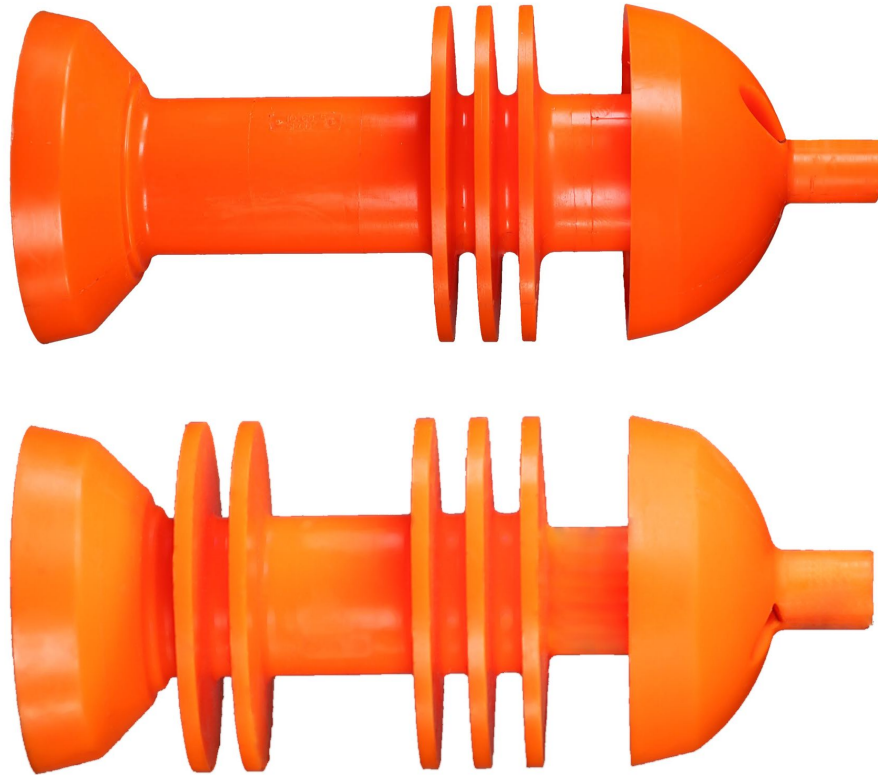

Description


The Super Flex 3D2C and 5D2C Pigs vary slightly from the original Super-Flex 3C by replacing the 2nd cup with Discs leaving three to five sealing disc options and a rear cup. The Super-Flex II is extremely effective in removing liquids from wet gas systems, as well as water, paraffin, and other debris from product and crude oil systems. Just like the Super-Flex, the hollow core design makes this pig lightweight while maintaining a superior seal. For more aggressive cleaning, wire brushes and debris magnets are options as is a transmitter for pig tracking. The Super-Flex II is also a great choice for product batching, line displacement, and product evacuation.

Options


- Sizes 6" – 12" and 16"
- Brush assemblies – Carbon Steel, Stainless Steel, Prostran
- Magnets
- Transmitter Compatible
- Several Durometer Hardnesses



Super Flex 3D2C / 5D2C

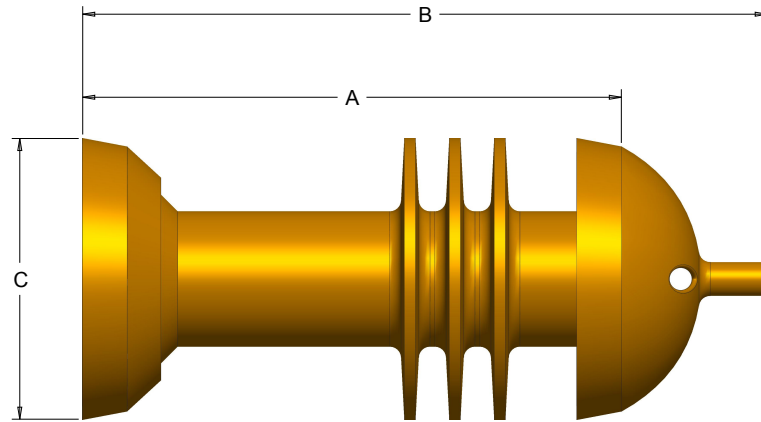

SUPER FLEX 3D2C				
Size Inches	A Inches	B Inches	C Inches	Weight lbs.
6"	12.75"	15"	6.62"	5.26
8"	16.250"	20"	8.68"	11.88
10"	20"	25"	10.68"	24.18
12"	24"	29"	12.5"	34.83
16"	27.5"	36"	16.25"	78.51

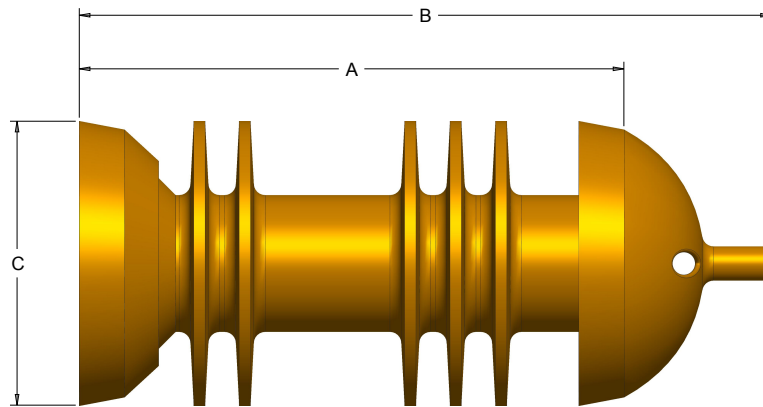

SUPER FLEX 5D2C				
Size Inches	A Inches	B Inches	C Inches	Weight lbs.
6"	12.75"	15"	6.62"	12.96
8"	16.250"	20"	8.68"	12.96
10"	20"	25"	10.68"	25.97
12"	24"	29"	12.5"	37.24
16"	27.5"	36"	16.25"	82.73